

HDMI EXTENDER (By CAT-5e/6 cable)

Dear customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 INTRODUCTION

This kind of HDMI Extender by CAT-5e/6 uses pieces of UTP cable with cross stand inside to extend the HDTV display up to 50 meters for 1080p. It not only breaks the limitation of the HDMI cable transmission length, but also CAT-5e/6 has more flexibility and convenience in cable construction.

It is equipped with HDMI (high definition multimedia interface) connectors and is capable of supporting DVI (digital visual interface) equipment when used with an HDMI to DVI Adapter, providing greater flexibility and options when integrating several home theater components.

This product offers solutions for residential consumers: HDTV retail and show site, HDTV, STUB, DVD and Projector factories, noise, space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.

1.1 BENEFITS

- 1) The length of HDMI cable is fixed and unchangeable after it is produced. Because the HDMI connector can only be soldered or terminated by the professional workers in factory, the users can not reduce or increase by themselves. However by the user or installer.
- 2) Because the header of the long HDMI cable is big, using it must in hidden method. What's more, it is not easy to bend the HDMI cable and to pull it

1

through the in-wall tube or tray. However, CAT-5e/6 cable has no such problems.
3) Using this Extender together with UTP cable with cross stand inside the transmission distance can be up to 50 meters for 1080p. For the general HDMI cables, they must be customized when the length is over 10 meters.

1.2 FEATURES

This HDMI Extender has many features that enable it to perform in a superior manner. Among those features you will find:

- One pair as a full functional module, no need of setting.
- CAT-5e/6 cable can substitute HDMI cable to achieve long distance transmission.
- Follow the standard of IEEE-568B.
- Transmission distance can be up to 50 meters for 1080p using UTP cable with cross stand inside.
- Auto-adjustment of feedback, equalization and amplify, the user does not need to care about the length of the cable.
- Compact size.
- Supports HDMI 1.2a.
- Supports highest video resolution 1080p.
- Supports 165MHz/1.65Gbps per channel (4.9Gbps all channel) bandwidth.
- Supports 8bit per channel (24bit all channel) deep color.
- Supports HDCP Support uncompressed audio such as LPCM.
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)

2.0 SPECIFICATIONS

Signal Inputs/Output	
Input Video Signal	5 Voits p-p(TTL)
Maximum Single Link Range	1920x1080P
Output Video	HDMI 1.2a + HDCP 1.0/1.1
HDMI Input/Output Connector	Type A 19 pin


2

HDMI SUPER EXTENDER BY CAT-5E/6

Operating Frequency	
Vertical Frequency Range	50/60Hz
Video Amplifier Bandwidth	1.65Gbps/165MHz
Resolutions(HDMI)	
Inter laced(50&60Hz)	480i, 576i, 1080i
Progressive(50&60Hz)	480p, 576p, 1080p
Mechanical	
Size(H-W-D)	45mmW x 22mmH x 82mmD
Weight(Net)	0.31KGs
Warranty	
Limited Warranty	1 Year Parts and Labor
Environmental	
Operating Temperature	0 °C to + 70 °C
Operating Humidity	10% to 85% RH (no condensation)
Storage Temperature	-10 °C to + 80 °C
Storage Humidity	5% to 90% RH (no condensation)
Power Requirement	
External Power Supply	5V DC@1A
Power consumption(Max)	5W
Regulatory Approvals	
Converter Unit	FCC, CE, UL
Power Supply	UL, CE, FCC
Accessories Adaptor	
AC Power Adaptor	US standard, UK standard and so on
User Manual	

HDMI SUPER EXTENDER BY CAT-5E/6

5.1 CONNECTION DIAGRAM

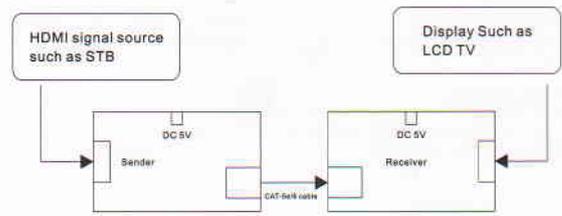

6.0 TROUBLESHOOTING

If the product doesn't appear to be functioning, make certain that there are four points you should pay attention to.

First, check the connection between the HDMI cable and the extender correctly. They all should be connected with a length 6 feet or less. (In other words, make certain that the problem is not caused by long cables).

Second, measure the cable length you are attempting to use between the sender and the receiver. They all should connect by UTP cable with cross stand inside for 1080p. Then, they can reach the length of 60M.

If the signal is present under those conditions, make certain that the power is present to the product. If it is, all cables should be premium quality.

Lastly, inspect the cables and connectors for damage.

3

6

HDMI SUPER EXTENDER BY CAT-5E/6

3.0 PACKAGE CONTENTS

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:


- 1) Main unit NO.1 Sender
- 2) Main unit NO.2 Receiver
- 3) 5V DC Power Supply
- 4) User's Manual

4.0 PANEL DESCRIPTIONS

Sender




Receiver

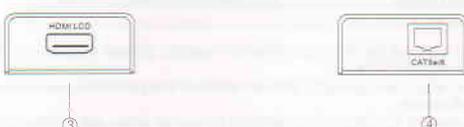

4

HDMI SUPER EXTENDER BY CAT-5E/6

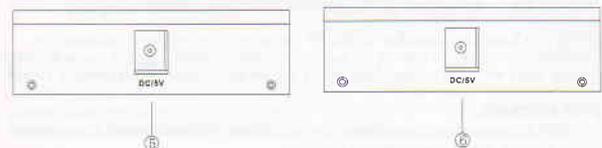

- 1) HDMI input
- 2) CAT-5e/6 output
- 3) HDMI output
- 4) CAT-5e/6 Input
- 5) Power Input1
- 6) Power Input2

5.0 Connection and Operation

- 1) Connect the HDMI sources such as: HD-DVD, PS3, STB etc.
- 2) Connect CAT-5e/6 cables to both the output of transmitter and input of the receiver.
- 3) Connect the HDMI output (such as: HD-LCD, HD-DLP) into the receiver.
- 4) Plug the power into the receiver.

Attention: Insert/Extract cable gently.

5